AH series

Ø 6.5 mm cylindrical inductive sensors

features

- **Extremely reduced dimensions**
- **Metal housing (stainless steel)**
- **LED status indicator 360° visible**
- **IP 67 protection degree**
- **ATEX models, cat. 3, available on request**
- **Complete protection against electrical damages**
- **Standard and long distance models**
- **Standard and short body housing**



web contents

- **Application notes**
- **Photos**
- **Catalogue / Manuals**

code description (*)

AH 1 / A P - 1 A

series	AH	Ø 6.5 mm inductive proximity switch
housing	1	Standard body
	6	Short body
output state	A	NO output state
	C	NC output state
output logic	N	NPN logic output
	P	PNP logic output
distance	1	Shielded standard 1.5 mm
	2	Unshielded standard 2.5 mm
	3	Long distance shielded 2 mm
	4	Unshielded long distance 4 mm
connect.	A	Axial cable exit
	F	M8 plug cable exit
	H	M12 plug cable exit

(*) ATEX models available, contact our Sales Dept. for further information.

available models

standard housing

diameter (mm)	installation	distance	connection	distance	NPN/NO	NPN/NC	PNP/NO	PNP/NC
Ø 6,5	shielded	standard	cable	1.5	AH1/AN-1A	AH1/CN-1A	AH1/AP-1A	AH1/CP-1A
			M8		AH1/AN-1F	AH1/CN-1F	AH1/AP-1F	AH1/CP-1F
			M12		AH1/AN-1H	AH1/CN-1H	AH1/AP-1H	AH1/CP-1H
	unshielded		cable	2.5	AH1/AN-2A	AH1/CN-2A	AH1/AP-2A	AH1/CP-2A
			M8		AH1/AN-2F	AH1/CN-2F	AH1/AP-2F	AH1/CP-2F
			M12		AH1/AN-2H	AH1/CN-2H	AH1/AP-2H	AH1/CP-2H
	shielded	long distance	cable	2	AH1/AN-3A	AH1/CN-3A	AH1/AP-3A	AH1/CP-3A
			M8		AH1/AN-3F	AH1/CN-3F	AH1/AP-3F	AH1/CP-3F
			M12		AH1/AN-3H	AH1/CN-3H	AH1/AP-3H	AH1/CP-3H
	shielded		cable	4	AH1/AN-4A	AH1/CN-4A	AH1/AP-4A	AH1/CP-4A
			M8		AH1/AN-4F	AH1/CN-4F	AH1/AP-4F	AH1/CP-4F
			M12		AH1/AN-4H	AH1/CN-4H	AH1/AP-4H	AH1/CP-4H

available models

short housing

diameter (mm)	installation	distance	connection	distance (mm)	NPN/NO	NPN/NC	PNP/NO	PNP/NC
Ø 6,5	shielded	standard	cable	1.5	AH6/AN-1A	AH6/CN-1A	AH6/AP-1A	AH6/CP-1A
			M8		AH6/AN-1F	AH6/CN-1F	AH6/AP-1F	AH6/CP-1F
	unshielded		cable	2.5	AH6/AN-2A	AH6/CN-2A	AH6/AP-2A	AH6/CP-2A
			M8		AH6/AN-2F	AH6/CN-2F	AH6/AP-2F	AH6/CP-2F
	shielded	long distance	cable	2	AH6/AN-3A	AH6/CN-3A	AH6/AP-3A	AH6/CP-3A
			M8		AH6/AN-3F	AH6/CN-3F	AH6/AP-3F	AH6/CP-3F
	unshielded		cable	4	AH6/AN-4A	AH6/CN-4A	AH6/AP-4A	AH6/CP-4A
			M8		AH6/AN-4F	AH6/CN-4F	AH6/AP-4F	AH6/CP-4F

correction factors

code	steel FE 360	copper	alluminium	brass	stainless steel
AH*/**-1*	1	0.06	0.13	0.24	0.56
AH*/**-2*		0.39	0.45	0.54	0.81
AH*/**-3*		0.1	0.17	0.25	0.6
AH*/**-4*		0.42	0.47	0.52	0.77


technical specification

	AH*/**-1*	AH*/**-2*	AH*/**-3*	AH*/**-4*
				
nominal sensing	1.5 mm	2.5 mm	2 mm	4 mm
working distance	0...1.21 mm	0...2.02 mm	0...1.62 mm	0...3.24 mm
hysteresis	1...20% Sr			
standard target	8x8 mm FE360			12x12 mm FE360
repeatibility	5%			
operating voltage	10...30 Vdc			
max ripple content	≤ 10%			
output type	NPN or PNP - NO or NC			
output current	≤ 200 mA			
output voltage drop	≤ 1.8 V @ 200 mA			
no-load supply current	10 mA			
leakage current	≤10 µA			
switching frequency	5 kHz			
power on delay	50 ms			
ambient temperature range	-25...+70 °C			
temperature drift of Sr	10%			
short-circuit protection	●			
voltage reversal protection	●			
induction protection	●			
shocks and vibrations	IEC 60947-5-2			
weight	5 g connector / 35 g cable			
LEDs	yellow LED output state			
protection degree	IP 67 (EN60529)			
EMC	in conformity with the EMC Directive, according to IEC 60947-5-2			
housing material	stainless steel			
active head material	PBT			
connection	cable 2 m PVC - plug M8 or M12			


electrical diagrams of connections

3 wires versions

M12 PNP




M12 NPN




BN brown
BU blue
BK black
WH white

M8 PNP




M8 NPN




BN brown
BU blue
BK black
WH white

plug


M8

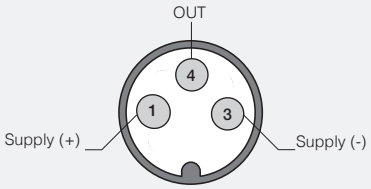

M12 NO




M12 NC




response diagram


AH*/**-1* parallel displacement

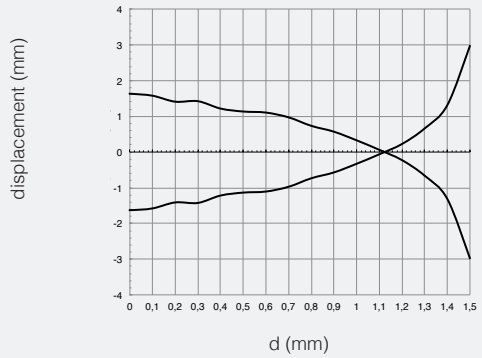


AH*/**-2* parallel displacement

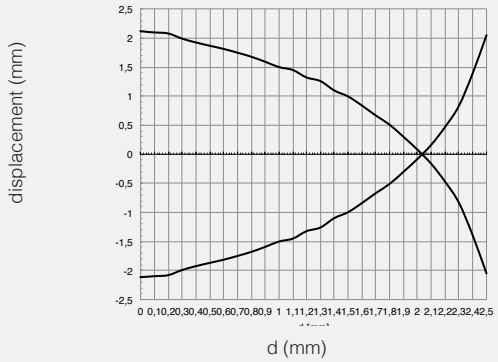


AH*/**-3* parallel displacement

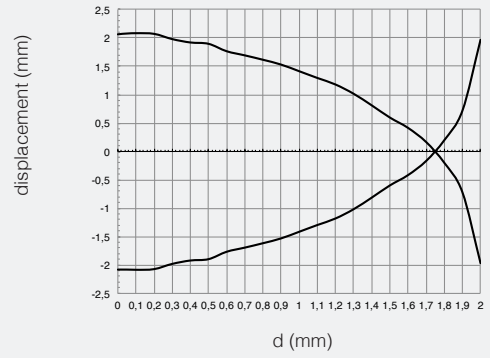

AH*/**-4* parallel displacement

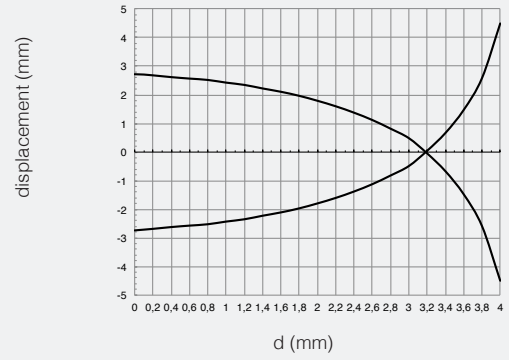

installation

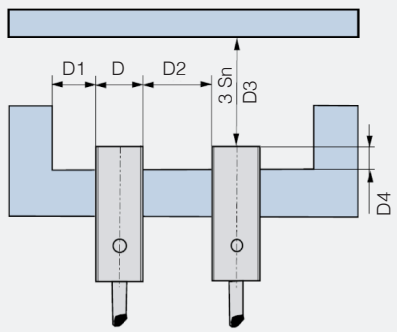


code	D4	D1	D2	D3
AH*/**-1*	≥ 1.3 mm (1)	≥ 3.25 mm	≥ 6.5 mm	≥ 4.5 mm
AH*/**-2*	≥ 5 mm	≥ 6.5 mm	≥ 13 mm	≥ 7.5 mm
AH*/**-3*	≥ 1.95 mm (1)	≥ 3.25 mm	> 6.5 mm	≥ 6 mm
AH*/**-4*	≥ 8 mm	≥ 6.5 mm	> 13 mm	≥ 12 mm


(1) ≥ 2,6 mm for non magnetic materials

dimensions (mm)


AH1/**-1A
AH1/**-3A

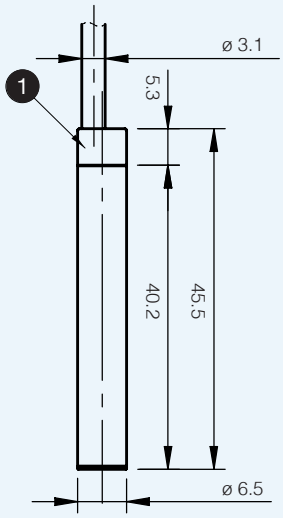


AH1/**-1F
AH1/**-3F

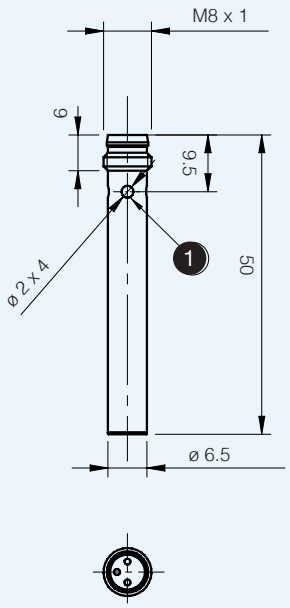


AH1/**-1H
AH1/**-3H

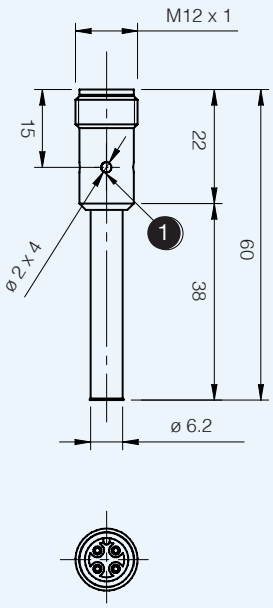

AH6/**-1A
AH6/**-3A

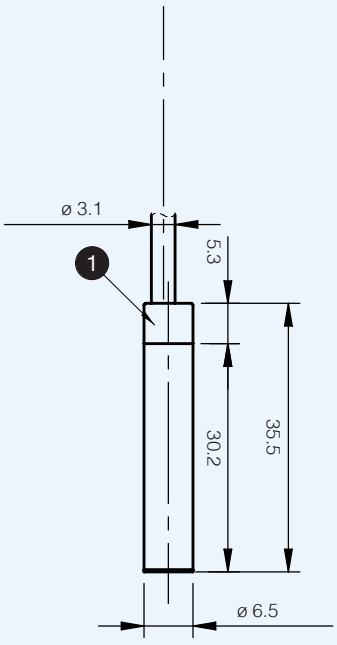


AH6/**-1F
AH6/**-3F

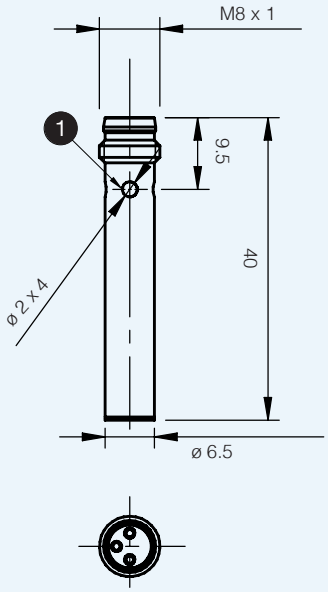


1 LED


AH1/**-2A
AH1/**-4A

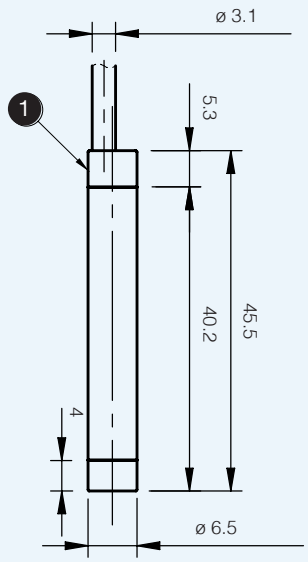


AH1/**-2F
AH1/**-4F

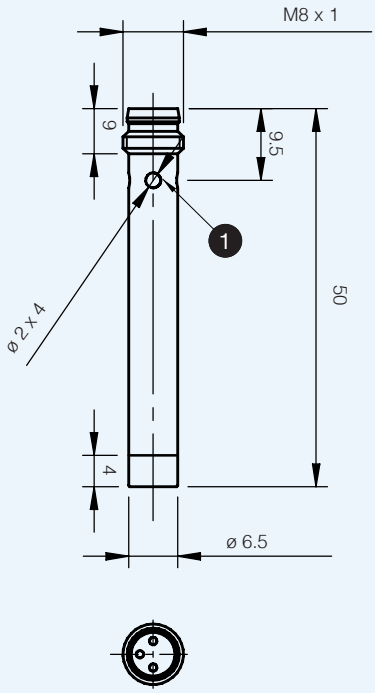


AH1/**-2H
AH1/**-4H

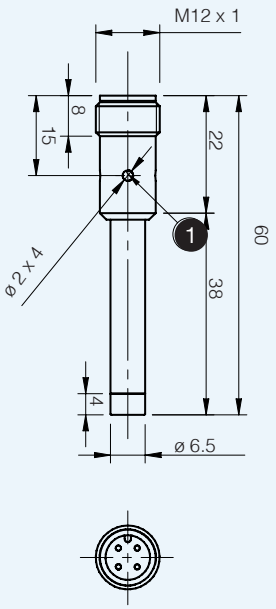

AH6/**-2A
AH6/**-4A

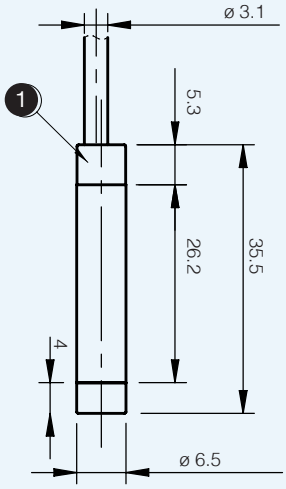

AH6/**-2F
AH6/**-4F

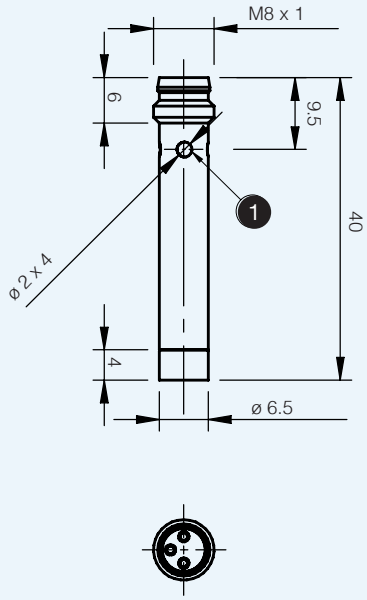

1 LED